

SECUREFOLD

FOR ALUMINIUM FOLDING DOORS UP TO 45kg and 75kg EACH

Securefold is the ultimate in exterior folding systems and opens up design to a wealth of new possibilities.

The Henderson Securefold system has been designed to maximise the flexibility of a room's living space, removing barriers and enabling the user to have an indoor/outdoor experience by fully opening up exterior walls.

The system which operates with effortless ease combines the benefits of folding doors with the ability to keep out the weather with no corrosion worries.

This modern, contemporary feature will increase available living space whilst allowing natural light to envelope a room.

APPLICATIONS

- ▶ Residential and commercial aluminium exterior folding applications.
- ▶ Specially suited to coastal environments with all components made from 316 stainless steel, anodised aluminium or polymers.
- ▶ End folding timber doors folding to one or both sides.
- ▶ Standard folding configuration features doors folding outward. Inward folding doors can be used where the doors are not directly exposed to the weather.
- ▶ Premium security features.
- ▶ Recognised weather resistance.

DOOR SPECIFICATION

For individual door leaves:	45kg	75kg
Maximum leaf height	3000mm	3000mm
Maximum leaf weight	45kg	75kg
Maximum leaf width	1000mm	1000mm
Maximum leaf thickness	35-68mm	35-68mm

The folding unit is not hinged to post, but is pivoted in the track and floor. All door leaves are of equal width. A swing leaf can be included by incorporating an odd number of leaves. For full weather protection, doors, frame and track should incorporate the seals provided in the Securefold range. Sill and frame construction should be in accordance with the Securefold fixing instructions. All hangers and hinges are non rebated.

GEAR SPECIFICATION

	45kg	75kg	
Track:	180	250	
Material:	anodised aluminium (anodising 25 microns)		
Standard lengths:	2000, 2500, 3000, 3500, 4000, 5000 and 6000mm		
Hanger/Hinge/Guide sets:	SFA4 45	SFA4	intermediate hanger/hinge/guide set
	SFA2R 45	SFA2R	end hanger/guide set right hand*
	SFA2L 45	SFA2L	end hanger/guide set left hand*
	SFA8 45	SFA8	end hanger meeting set**
	SFA1 45	SFA1	pivot/guide set
	SFA3	SFA3	hinge set with handle
	SFA5	SFA5	hinge set inward opening
	SFA6	SFA6	hinge set offset inward opening
	SFA7	SFA7	hinge set offset outward opening
	SFA9	SFA9	intermediate pivot hinge for doors above 2200mm
Channel:	SF94P	SF94P	polypropylene guide channel
	SF94SC	SF94SC	anodised aluminium support channel
	Channel lengths correspond with standard track lengths.		
Seals:	AQ48B	AQ48B	door perimeter seal brown
	AQ21B	AQ21B	frame perimeter seal brown
	BS10	BS10	


* End hanger/guide sets are handed inside looking out.

** End hanger set for a pair of meeting doors.

EXTERIOR FOLDING SYSTEM



SECUREFOLD

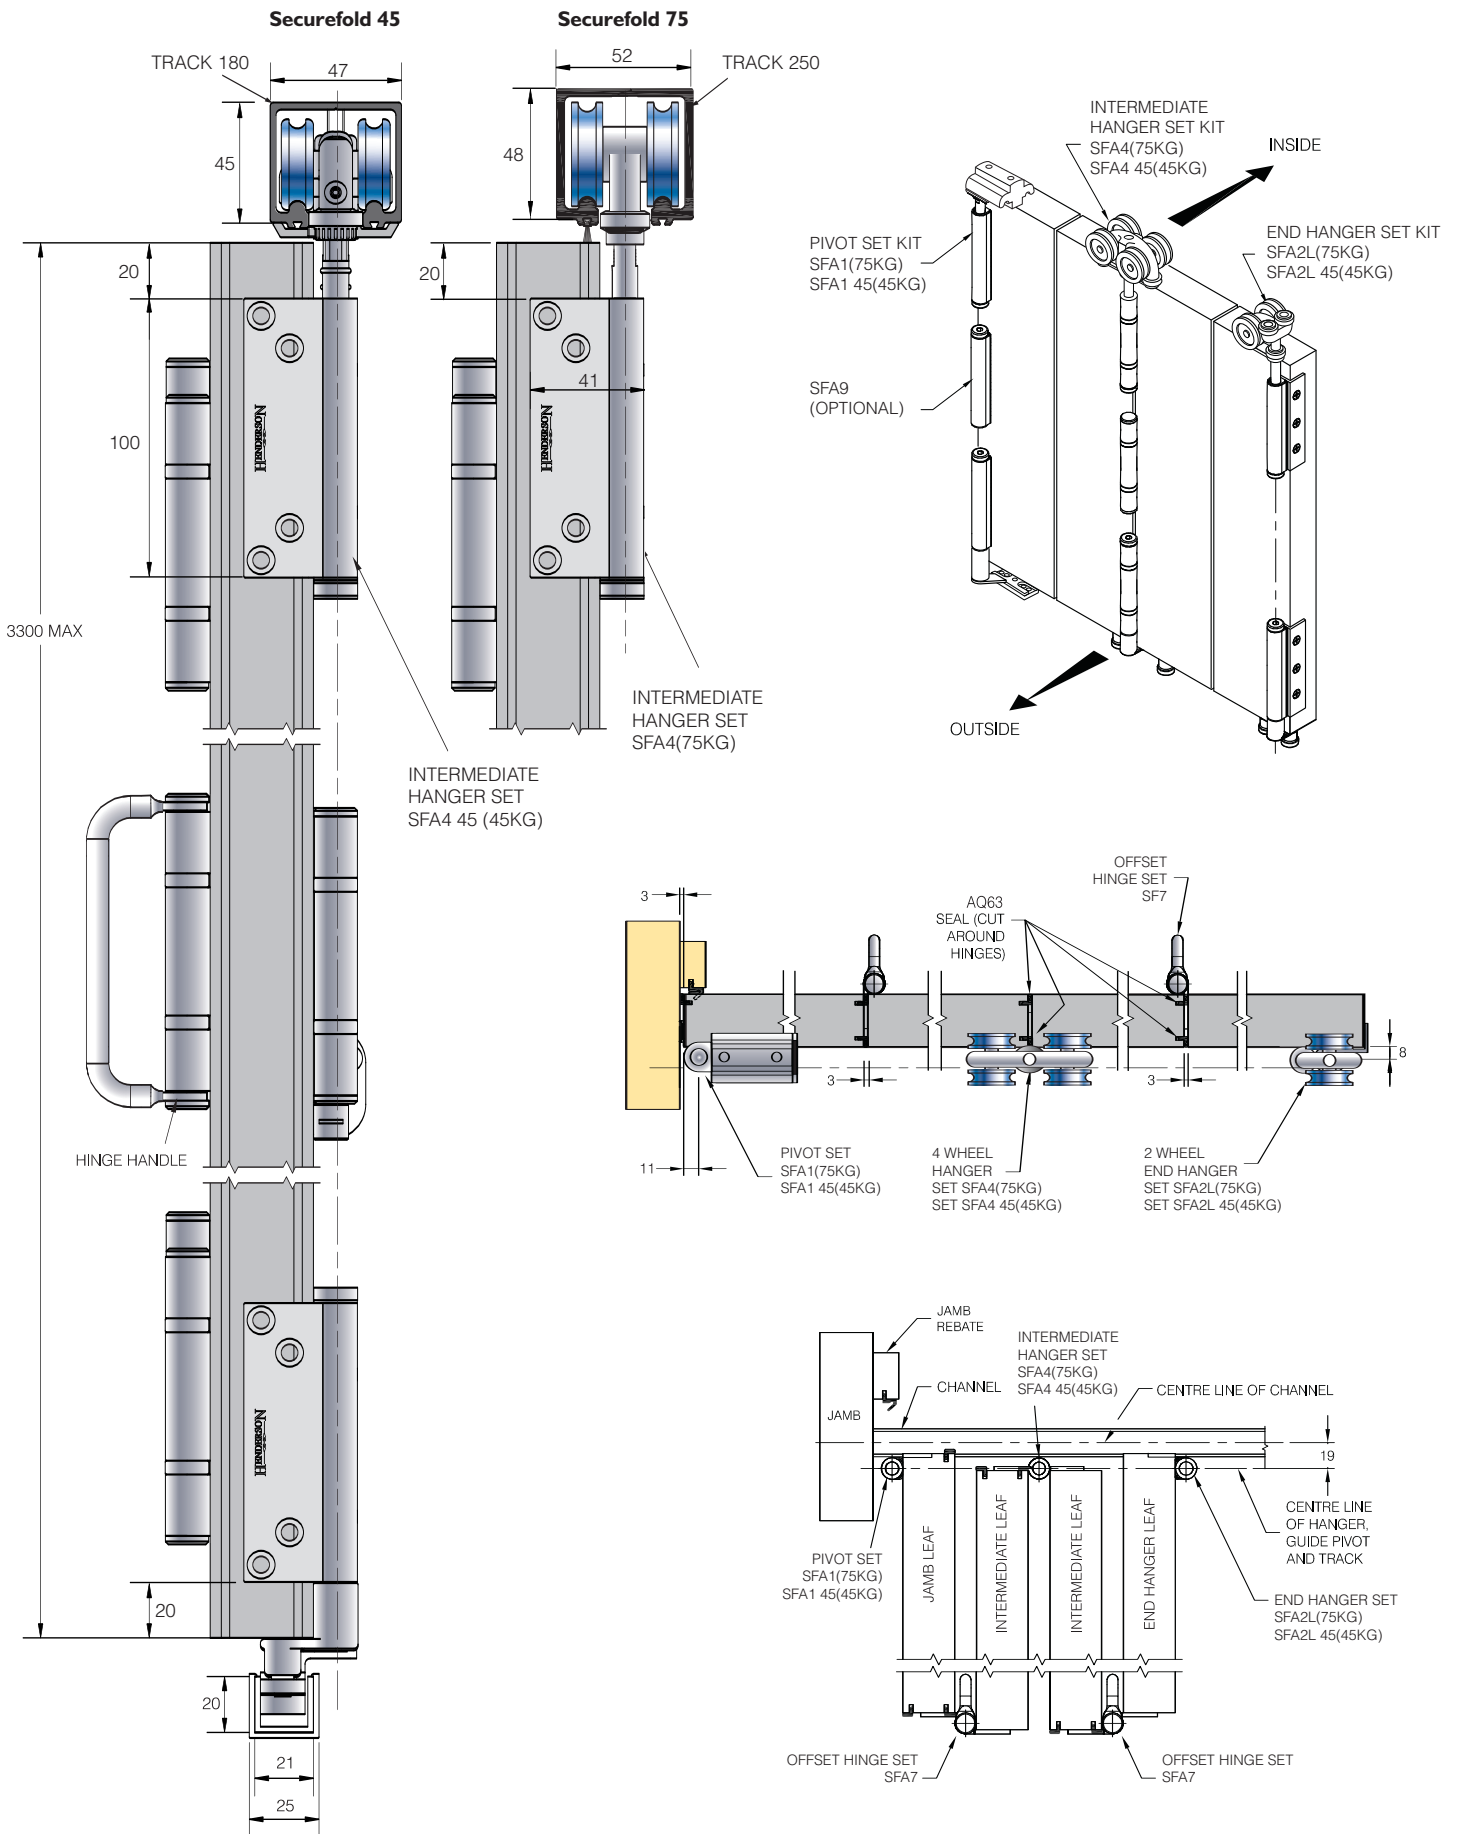

HENDERSON

P C Henderson Limited, Durham Road, Bowburn, County Durham DH6 5NG, UK. Web: www.pchenderson.com
 Customer Services Department: Tel: +44 (0)191 377 7345 Fax: +44 (0)191 377 3116 Email: sales@pchenderson.com
 Export Department: Tel: +44 (0)191 377 7346 Fax: +44 (0)191 377 0755 Email: international@pchenderson.com