

SOLTAIRE 180

TOP HUNG STRAIGHT SLIDING DOOR SYSTEM FOR DOORS UP TO 180kg EACH

APPLICATIONS




- ▶ Manufactured from high grade 316 stainless steel within anodised aluminium track.
- ▶ This reliable system is extremely durable and ideal for coastal applications or heavy use.
- ▶ Ideal for areas requiring a high level of corrosion resistance.
- ▶ Designed for interior and exterior doors up to 180 kg.
- ▶ Ideal for residential or commercial applications.
- ▶ Designed to accommodate multiple doors which can slide to either side or both sides.
- ▶ Hangers available for timber or metal doors.
- ▶ The track can be soffit fixed or face fixed to give flexibility of installation.

DOOR SPECIFICATION

Max panel weight	180 kg
Max panel thickness	48mm
Min panel thickness	35mm
Max panel height	3000mm


GEAR SPECIFICATION

Track	Anodised aluminium (25 microns) available in lengths <i>Soffit fix spacing 900mm centres (maximum)</i>	180/2000A, 180/2500A, 180/3000A, 180/4000A, 180/5000A & 180/6000A
Brush strips	Available in black in 4 brush heights, by the metre	BS10, BS15, BS20, BS25(mm)
Brackets	Face fixed stainless steel Double face fixed stainless steel bracket (heavy) <i>Starting 20mm from end of track fix at 900mm centres (maximum)</i>	1/SS 5H/SS
Hangers	2 required per door Timber doors - corner plate fixing - saddle plate fixing - (concealed) plate fixing Metal doors - angled frame door fixing - box frame fixing - (concealed) plate fixing	52/180/SS 53/180/SS 57/180/SS 56/180/SS 56X/180/SS 57/180/SS
Guides	Timber doors - (concealed) fixing with SS bearing - wall mounted guide - for multiple runs of doors use Metal doors - box section metal door - long - box section metal door	106H SS/94 102 SS/94 102 SS/94 104PX/89 104P/89
Channels	Aluminium (2000, 2500, 3000 & 6000mm) Stainless steel (3000mm length only) Brass (1500mm and 3000mm length only) Galvanised steel (1800, 2000, 2500 & 3000mm) Polypropylene channel Aluminium supporting channel for polypropylene	94X 89SS 94 89 94P 94SC
Track Stop	HH5/SS	

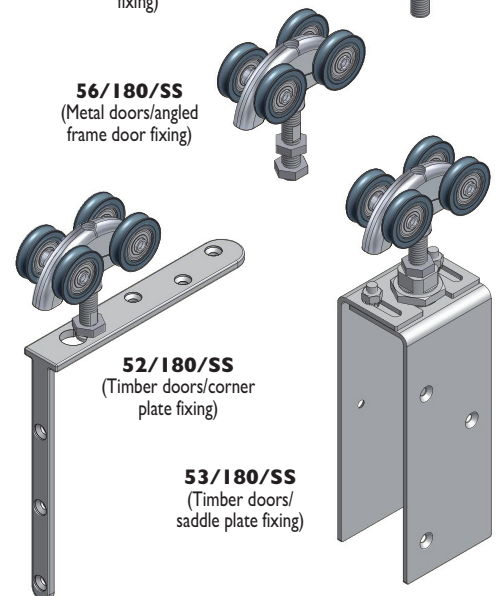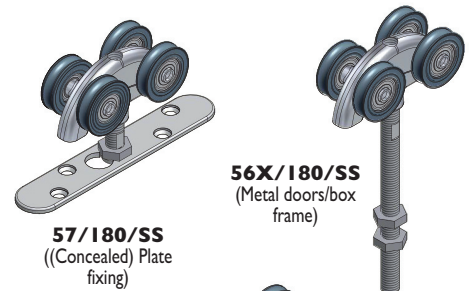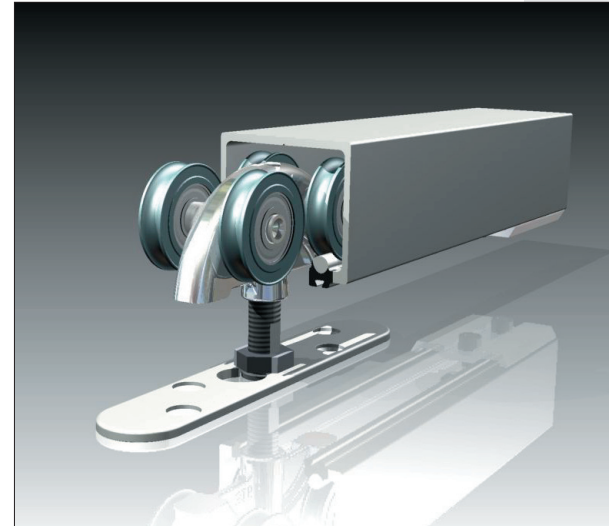


53/180/SS
(Timber doors/
saddle plate fixing)

HH5/SS
(Track stop)




106H SS/94
(Guide)



102 SS/94
(Guide)









1/SS
(Bracket)



5H/SS
(Bracket)

SOLTAIRE 180

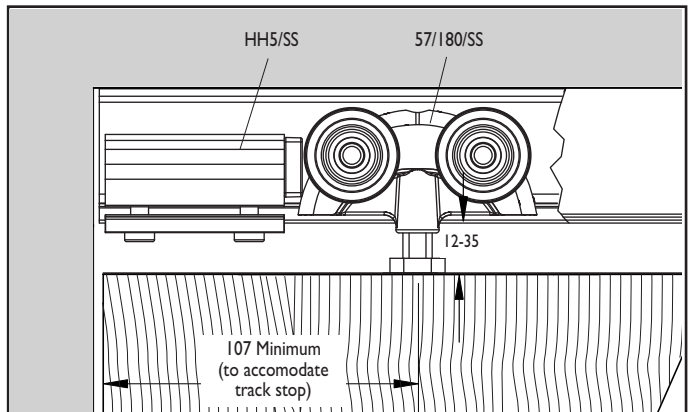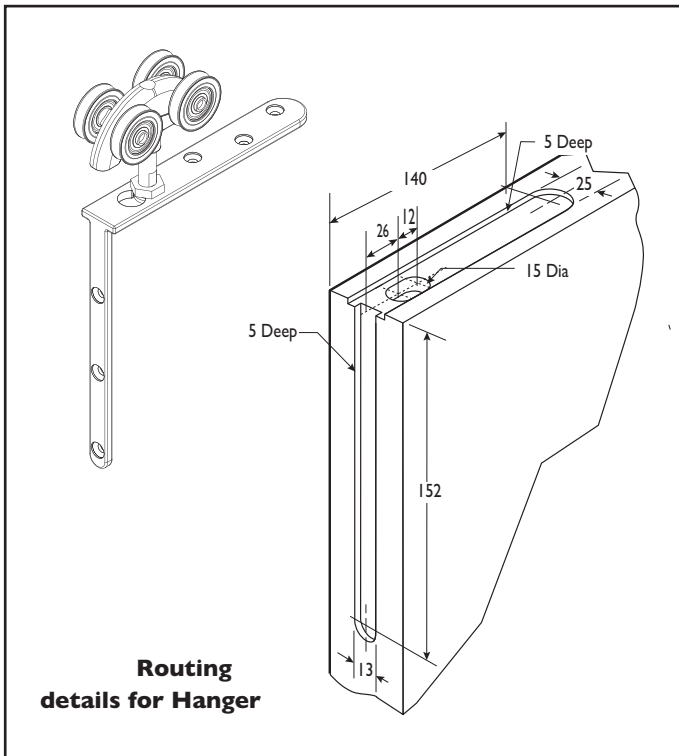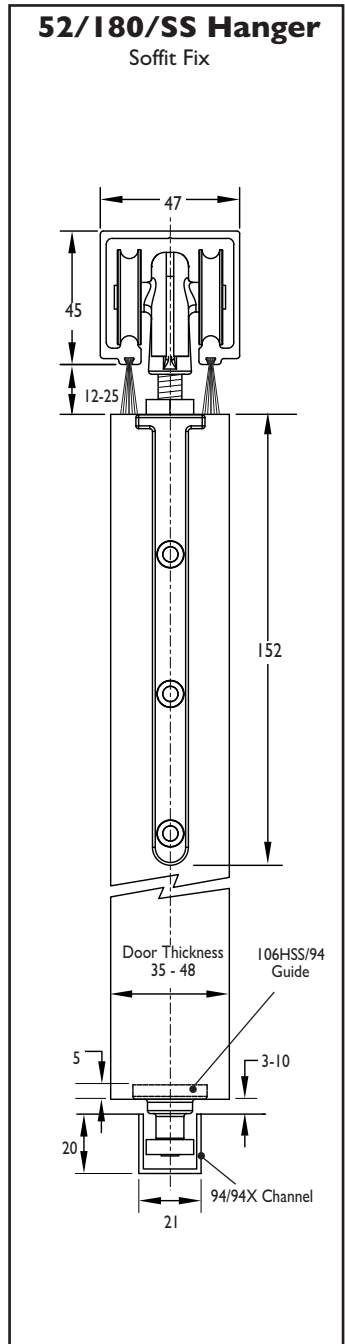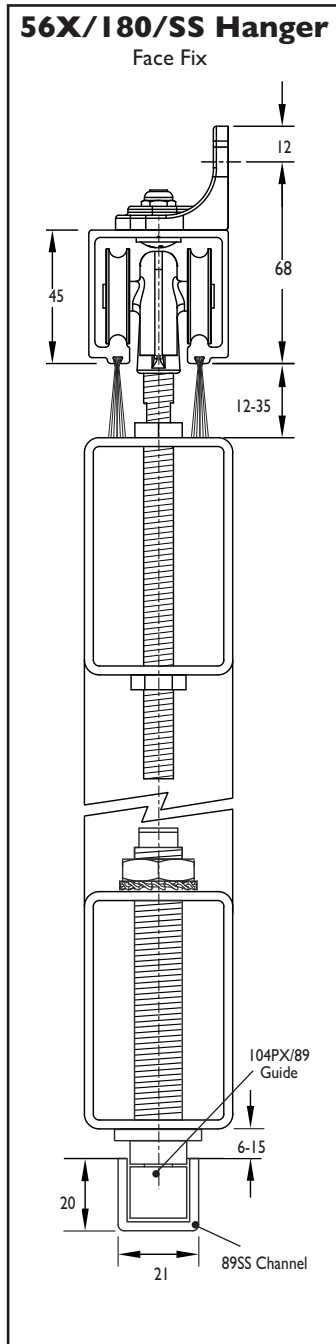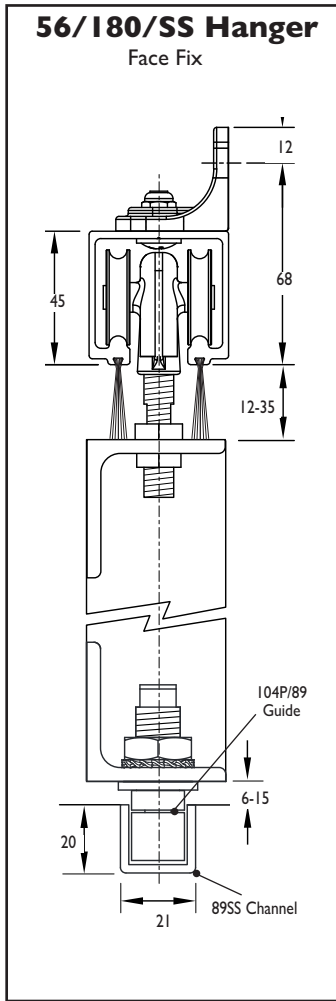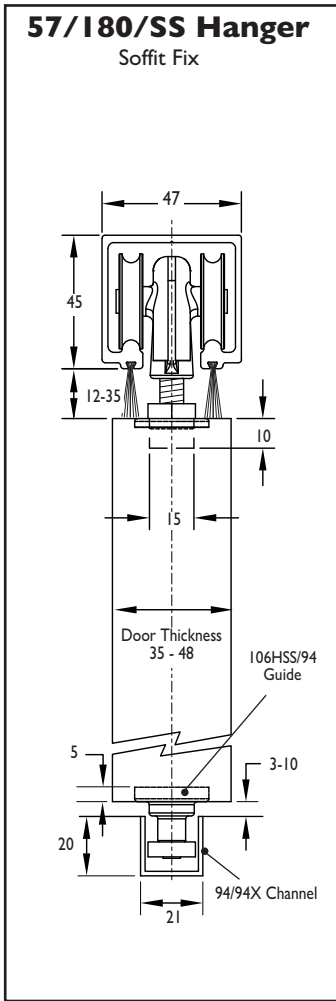

(All dimensions are in mm.)